

Specification for Model #:H-330-MN, H-331-MN, H-330-A-MN, H-331-A-MN, H-330-B-MN, H-331-B-MN, H-330-C-MN & H-331-C-MN

Friendly™ Product – Not ADA Compliant

Warm Rain® models H-330 (RH) & H-331 (LH) Friendly™ tub/shower fixtures are constructed of reinforced polyester resin covered with a high gloss gel-coat of 18 - 20 mil. thickness. The reinforced fiberglass includes a minimum content of 18 % fiberglass. This unit is a 3 piece remodeling tub/shower with twin corner shelves.


The bottom base of the unit is constructed of 1/2” end-grained balsa wood sandwiched between 2 layers of reinforced fiberglass at a content of no less than 18%. The base is an integral part of the unit.

The unit will measure 60” x 30” x 79.5” and has a 15” apron height and a textured bottom floor. This unit may be ordered with the above floor rough-in. For above floor rough-in, add AFR after model # (i.e. H-330 AFR.) If ordered with the above floor rough-in add 2” to apron height and 2” to overall height.

These units are reinforced for the future installation of grab bars. The reinforcement is shown in the diagram below.

Antibacterial additive is an option for this unit.

These Warm Rain® Friendly™ showers arrive on site fully tested, inspected, and certified to meet or exceed the precise standards established by FHA/HUD, materials bulletin 73, American National Standards Z-124.1 and Z-124.2, ASTM/E-84 and is certified by the National Association of Home Builders NAHB). These Friendly™ units comply with the Fair Housing Act for Adaptability.

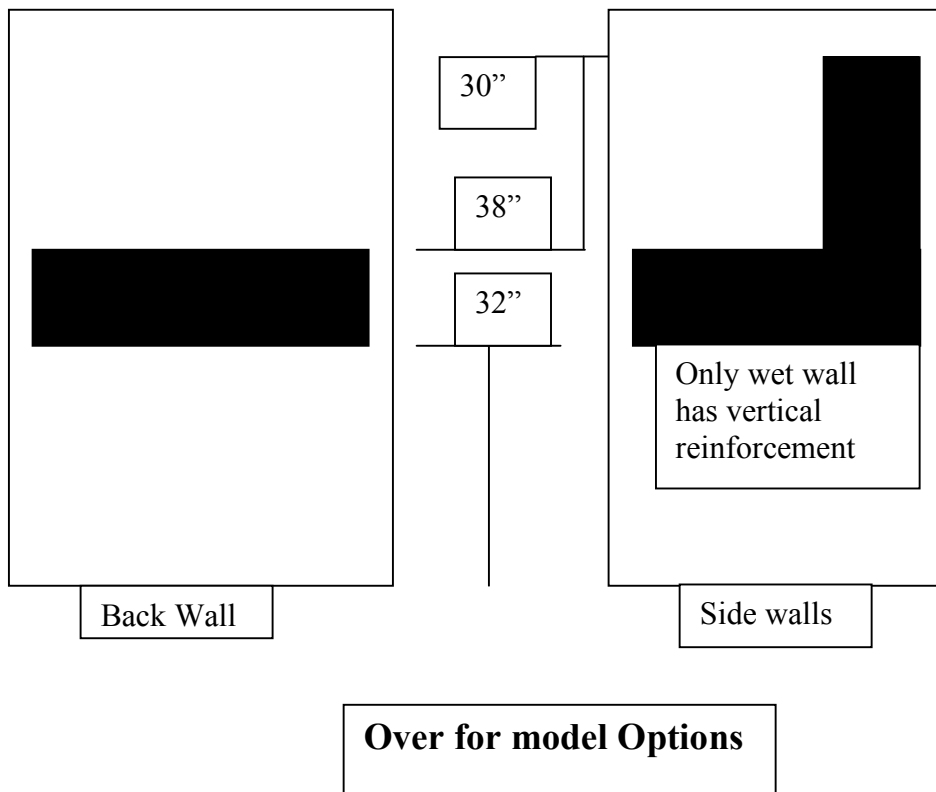

Specification for Model #:H-330-MN, H-331-MN, H-330-A-MN, H-331-A-MN, H-330-B-MN, H-331-B-MN, H-330-C-MN & H-331-C-MN

Friendly™ Product – Not ADA Compliant

H-330-A-MN & H-331-A-MN:

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 1 – 24", 2-36" & 2-12" grab bars. The wall reinforcement is wood fiberglassed into the unit. 1-12" grab bar will be placed on each side wall 34.5" above the floor. 2-24" grab bars will be placed on the back wall at 26.5" & 34.5" above the floor. 1-24" vertical grab bar will be placed 4" above the horizontal bar half way between the front of the unit and the middle of the wet wall.

H-330-B-MN & H-331-B-MN:

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 2-24" horizontal grab bars & 2-12" horizontal grab bars installed on the unit. The wet wall will have 1-12" grab bar located 34.5" above the floor. 2-24" grab bars will be installed on the back wall and will be installed 34.5" and 26.5" above the floor. 1-12" grab bar will be placed on the dry wall at 34.5" above the floor. The ADA compliant seat will be factory installed. 1-24" vertical grab bar will be placed 4" above the horizontal bar half way between the front of the unit and the middle of the wet wall. The seat will support a minimum of 250#s. The wall reinforcement is 1/2" CDX plywood fiberglassed into the unit. The seat will be placed on top of the apron 17" above the floor and 6" from the back wall. The seat is a phenolic white ADA compliant seat.

H-330-C-MN & H-331-C-MN

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 2-24" horizontal grab bars & 2-12" horizontal grab bars installed on the unit. The wet wall will have 1-12" grab bar located 34.5" above the floor. 2-24" grab bars will be installed on the back wall and will be installed 34.5" and 26.5" above the floor. 1-12" grab bar will be placed on the dry wall at 34.5" above the floor. 1-24" vertical grab bar will be placed 4" above the horizontal bar half way between the front of the unit and the middle of the wet wall. The ADA compliant seat will be factory installed. The seat will support a minimum of 250#s. The wall reinforcement is 1/2" CDX plywood fiberglassed into the unit. The seat will be placed on top of the apron 17" above the floor and 6" from the back wall. The seat is a phenolic white ADA compliant seat. 1-Symmons Temptrol Valve and Kit model # S-25-400-B30-V-X-2000 will include a Temptrol 2000 pressure balance valve, hand held shower with a 30" bar, and a vacuum breaker & tub diverter. Also, 1-Seachrome 5' curtain rod with hangers will be included with the unit



Warm Rain® Corporation, P.O. Box 600, Hancock, MI 49930

Voice: 906-482-3750 * Fax: 906-482-2585 * E-mail: tedk@warmrain.com * Website: www.warmrain.com