

Specification for models: H-44-MN & H-45-MN, H-44-A-MN, H-45-A-MN, H-44-B-MN, H-45-B-MN, H-44-C-MN & H-45-C-MN

Friendly™ Tub/showers – ADA compliant tub/shower

Warm Rain® models H-44-MN (RH) and H-45-MN (LH) Friendly™ tub/shower fixtures are constructed of reinforced polyester resin covered with a high gloss gel-coat of 18 - 20 mil. thickness. The reinforced fiberglass includes a minimum content of 18 % fiberglass. This unit is a one piece tub/shower.


The bottom base of the unit is constructed of 1/2” end-grained balsa wood sandwiched between 2 layers of reinforced fiberglass at a content of no less than 18%. The base is an integral part of the unit.

The unit will measure 60” x 32 ½” x 75” and has a 15” apron height and has a textured bottom floor. The unit may be ordered with the above the floor rough-in. Add AFR to the model number (i.e. H-44-MN AFR) and add 2” to apron height and overall unit height. The texture bottom floor meets and exceeds ASTM Safety Specification F-462.

These units are reinforced for the future installation of grab bars. The reinforcement is shown in the diagram below.

Antibacterial additive is an option for this unit.

These Warm Rain® Friendly™ tub/shower arrives on site fully tested, inspected, and certified to meet or exceed the precise standards established by FHA/HUD, materials bulletin 73, American National Standards Z-124.1 and Z-124.2, ASTM/E-84 and is certified by the National Association of Home Builders NAHB). These Friendly™ units comply with the Fair Housing Act for adaptability and as ADA compliant tub/showers in the “B” and “C” packages.

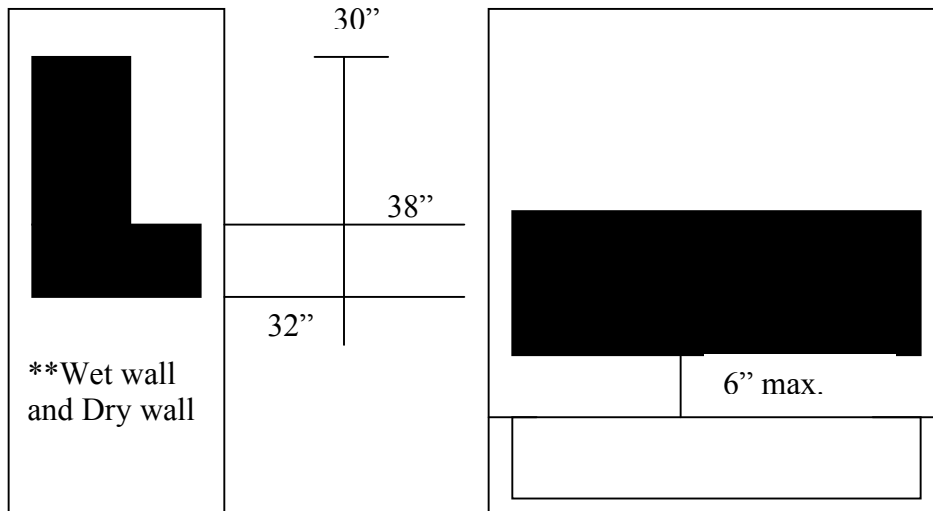

**Wet wall includes vertical reinforcement in addition to the horizontal reinforcement and Dry wall only contains horizontal reinforcement

 Represents reinforced area

Specification for models: H-44-MN & H-45-MN, H-44-A-MN, H-45-A-MN, H-44-B-MN, H-45-B-MN, H-44-C-MN & H-45-C-MN

Friendly™ Tub/showers – ADA compliant tub/shower

H-44-A-MN/ H-45-A-MN: Models includes Grab Bars

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 3- 24" horizontal grab bars and 2-36" horizontal grab bars. The wall reinforcement is wood fiberglassed into the unit. 1-24" grab bar on the wet wall will be placed 34.5" above the floor. 1-24" vertical grab bar will be placed 4" above the horizontal bar half way between the front of the unit and the middle of the wet wall. 2-36" grab bars on the back wall will be placed 34.5" and 26.5" above the floor. 1-24" grab bar will be placed opposite the wet wall at 34.5" above the floor.

H-44-B-MN / H-45-B-MN: Models includes Grab Bars & Fold-up Seat

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 4-24" horizontal grab bars and 1-12" grab bar installed on the unit. The wet wall will have 1-24" grab bar located 34.5" above the floor. 1-24" vertical grab bar will be placed 4" above the horizontal bar half way between the front of the unit and the middle of the wet wall. 2-24" grab bars will be installed on the back wall and will be installed 34.5" and 26.5" above the floor. 1-12" grab bar will be placed on the dry wall. The ADA compliant seat will be factory installed. The seat will support a minimum of 250#s. The wall reinforcement is 1/2" CDX plywood fiberglassed into the unit. The seat will be placed on top of the apron 18" above the floor and 6" from the back wall. The seat is a white phenolic ADA compliant seat.

H-44-C-MN/ H-45-C-MN: Models includes Grab Bars, Fold-Up Seat, Pressure Balance Valve, Hand held Shower with Slide Bar, Vacuum Breaker, Tub Diverter Spout, Curtain Rod with Hangers

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 3-24" horizontal grab bar and 1-12" grab bar installed on the unit. The wet wall will have 1-24" grab bar located 34.5" above the floor. 1-24" vertical grab bar will be placed 4" above the horizontal bar half way between the front of the unit and the middle of the wet wall. 2-24" grab bars will be installed on the back wall and will be installed 34.5" and 26.5" above the floor. 1-12" grab bar will be placed on the dry wall. The ADA compliant seat will be factory installed. The seat will support a minimum of 250#s. The wall reinforcement is 1/2" CDX plywood fiberglassed into the unit. The seat will be placed on top of the apron 18" above the floor and 6" from the back wall. The seat is a white phenolic ADA compliant seat. 1-Symmons Temptrol Valve & Kit model # S-25-400-B30-V-X-2000 will include a Temptrol 2000 pressure balance valve, Hand held shower with 30" bar, Vacuum breaker, & a Tub diverter spout. Also, a Seachrome 5' Curtain rod with hangers will be included with the unit.



Warm Rain® Corporation, P.O. Box 600, Hancock, MI 49930

Voice: 906-482-3750 Fax: 906-482-2585 email: tedk@warmrain.com website: www.warmrain.com