

**Specifications for Friendly™ Models:**

**WR 1960, WR 1960-A, WR 1960-B, WR 1960-C, WR 3960, WR 3960-A, WR 3960-B, WR 3960-C**

Warm Rain Models WR 1960 (1-piece) & WR 3960 (4-piece remodeler) Friendly™ Showers are constructed of reinforced polyester resin covered with a high gloss gel-coat of 18-20 mil. thickness. The reinforced fiberglass includes a minimum content of 18% fiberglass.

The bottom base of the unit is constructed of 1/2" end-grained balsa wood sandwiched between 2 layers of reinforced fiberglass at a content no less than 18%. The base is an integral part of the unit.


The unit will measure 60 1/2" L x 39" W x 77 1/2" H and has a textured bottom floor and will use a standard shower drain.

These units are reinforced with 1/2" plywood that is completely encased by polyester resin covered with fiberglass for the future installation of grab bars & a fold-up seat. The 1/2" plywood reinforcement is shown in the diagram below and is in accordance with grab bar placement and seat placement for ADA roll-in showers as stated in the Federal Register on July 1, 1994.

The WR 3960 (remodeling roll-in shower) needs to be bolted (all bolts, nuts and washers provided) together on the jobsite. All seams need to have the neoprene gasket (provided) installed a 1/4" from the front seam. If neoprene gasket is not used, a 1/2" silicone bead is required in all seam areas.

**Antibacterial additive is an option for this unit.**

These Warm Rain® Friendly™ showers arrive on site fully tested, inspected, and certified to meet or exceed the precise standards established by FHA/HUD, materials bulletin 73, American National Standards Z-124.1 and Z-124.2, ASTM/E-84, F-462 (slip resistant,) NFPA 258 – Class B (75 or less) rating and is certified by the National Association of Home Builders NAHB. These Adaptable units comply with the Fair Housing Act.

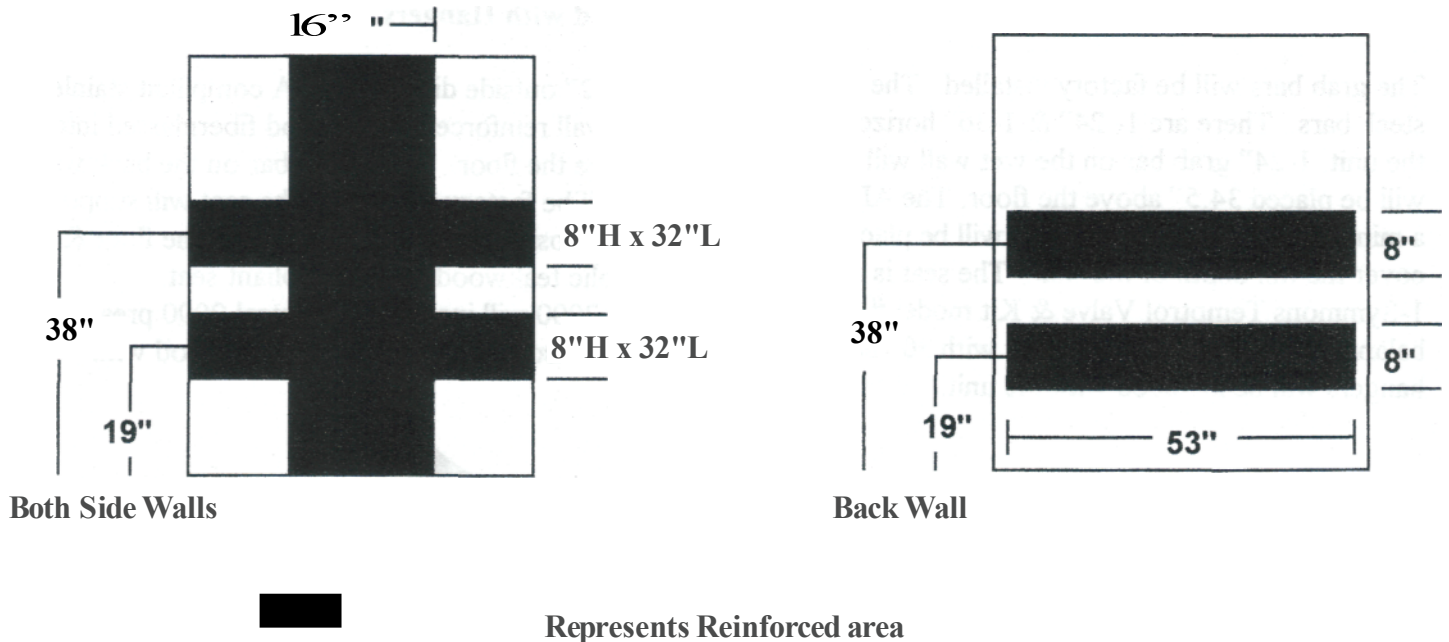

**(Over for Model Option Specifications)**

**WR 1960-A & WR 3960-A: Models includes Grab Bars:**

**Warm Rain® Corporation**

P.O. Box 600 • Houghton County Airpark • Hancock, Michigan 49930

Phone: (906) 482-3750 Fax: (906) 482-2585 • E-mail: [tedk@warmrain.com](mailto:tedk@warmrain.com) • Website: [www.warmrain.com](http://www.warmrain.com)

Specifications for Friendly™ Models:

WR 1960, WR 1960-A, WR 1960-B, WR 1960-C, WR 3960, WR 3960-A, WR 3960-B, WR 3960-C

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 2- 24" & 1-36" horizontal grab bars. The wall reinforcement is wood fiberglassed into the unit. 1- 24" grab bar on the wet wall will be placed 34.5" above the floor. 1-36" grab bar on the back wall will be placed 34.5" above the floor. 1-24" grab bar will be placed opposite the wet wall at 34.5" above the floor.

**WR 1960-B & WR 3960-B: Models includes Grab Bars & Fold-up Seat:**

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 1- 24" & 1-36" horizontal grab bars. The wall reinforcement is wood fiberglassed into the unit. 1- 24" grab bar on the wet wall will be placed 34.5" above the floor. 1-36" grab bar on the back wall will be placed 34.5" above the floor. The ADA compliant seat will be factory installed. The seat will support a minimum of 250 #s. The seat will be placed on the side wall opposite the controls 18" above the floor & cover the full depth of the stall. The seat is an "L" shaped white teakwood ADA compliant seat.

**WR 1960-C & WR 3960-C: Models includes Grab Bars, Fold-Up Seat, Pressure Balance Valve, Hand held Shower with Slide Bar, Vacuum Breaker, & Curtain Rod with Hangers:**

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 1- 24" & 1-36" horizontal grab bars. The wall reinforcement is wood fiberglassed into the unit. 1- 24" grab bar on the wet wall will be placed 34.5" above the floor. 1-36" grab bar on the back wall will be placed 34.5" above the floor. The ADA compliant seat will be factory installed. The seat will support a minimum of 250 #s. The seat will be placed on the side wall opposite the controls 18" above the floor & cover the full depth of the stall. The seat is an "L" shaped phenolic white ADA compliant seat. 1-Symmons Temptrol Valve & Kit model # S-25-300-B30-V-X-2000 will include a Temptrol 2000 pressure balance valve, Hand held shower with 30" bar, Vacuum breaker. Also, 1-Seachrome 5' Curtain rod with hangers will be included with the unit.



**Warm Rain® Corporation**

P.O. Box 600 • Houghton County Airpark • Hancock, Michigan 49930

Phone: (906) 482-3750 Fax: (906) 482-2585 • E-mail: [tedk@warmrain.com](mailto:tedk@warmrain.com) • Website: [www.warmrain.com](http://www.warmrain.com)