

Specifications for Friendly™ Models:

WR 1960-MN, WR 1960-A,-MN WR 1960-B-MN, WR 1960-C-MN
WR 3960-MN, WR 3960-A-MN, WR 3960-B-MN, WR 3960-C-MN

Warm Rain Models WR 1960-MN (1-piece) & WR 3960-MN (4-piece remodeler) Friendly™ Showers are constructed of reinforced polyester resin covered with a high gloss gel-coat of 18-20 mil. thickness. The reinforced fiberglass includes a minimum content of 18% fiberglass.

The bottom base of the unit is constructed of 1/2" end-grained balsa wood sandwiched between 2 layers of reinforced fiberglass at a content no less than 18%. The base is an integral part of the unit.


The unit will measure 60 1/2" L x 39" W x 77 1/2" H and has a textured bottom floor and will use a standard shower drain.

These units are reinforced with 1/2" plywood that is completely encased by polyester resin covered with fiberglass for the future installation of grab bars & a fold-up seat. The 1/2" plywood reinforcement is shown in the diagram below and is in accordance with grab bar placement and seat placement for ADA roll-in showers as stated in the Federal Register on July 1, 1994.

The WR 3960-MN (remodeling roll-in shower) needs to be bolted (all bolts, nuts and washers provided) together on the jobsite. All seams need to have the neoprene gasket (provided) installed a 1/4" from the front seam. If neoprene gasket is not used, a 1/2" silicone bead is required in all seam areas.

Antibacterial additive is an option for this unit.

These Warm Rain® Friendly™ showers arrive on site fully tested, inspected, and certified to meet or exceed the precise standards established by FHA/HUD, materials bulletin 73, American National Standards Z-124.1 and Z-124.2, ASTM/E-84, F-462 (slip resistant,) NFPA 258 – Class B (75 or less) rating and is certified by the National Association of Home Builders NAHB. These Adaptable units comply with the Fair Housing Act.

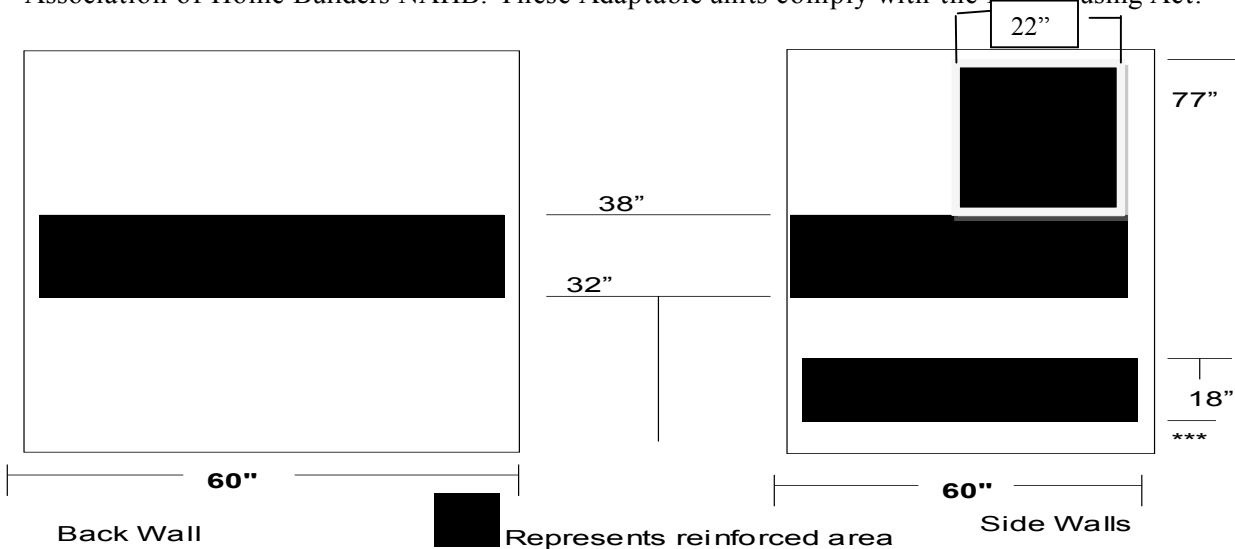

Reinforcement for fold-up seat is only on B & C Packages

WR 1960-A-MN & WR 3960-A-MN: Models includes Grab Bars:

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel

Warm Rain® Corporation

P.O. Box 600 • Houghton County Airpark • Hancock, Michigan 49930

Phone: (906) 482-3750 Fax: (906) 482-2585 • E-mail: tedk@warmrain.com • Website: www.warmrain.com

Specifications for Friendly™ Models:

WR 1960-MN, WR 1960-A,-MN WR 1960-B-MN, WR 1960-C-MN
WR 3960-MN, WR 3960-A-MN, WR 3960-B-MN, WR 3960-C-MN

bars. There are 2- 24" & 1-36" horizontal grab bars and 1 – 24" vertical grab bar. The wall reinforcement is wood fiberglassed into the unit. 1-24" grab bar on the wet wall will be placed 34.5" above the floor. 1-36" grab bar on the back wall will be placed 34.5" above the floor. 1-24" grab bar will be placed opposite the wet wall at 34.5" above the floor. 1-24" vertical grab bar will be placed 4" above the horizontal bar half way between the front of the unit and the middle of the wet wall.

WR 1960-B-MN & WR 3960-B-MN: Models includes Grab Bars & Fold-up Seat:

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 1- 24" & 1-36" horizontal grab bars and 1 – 24" vertical grab bar. The wall reinforcement is wood fiberglassed into the unit. 1-24" grab bar on the wet wall will be placed 34.5" above the floor. 1-36" grab bar on the back wall will be placed 34.5" above the floor. 1-24" vertical grab bar will be placed 4" above the horizontal bar half way between the front of the unit and the middle of the wet wall. The ADA compliant seat will be factory installed. The seat will support a minimum of 250 #s. The seat will be placed on the side wall opposite the controls 18" above the floor & cover the full depth of the stall. The seat is an "L" shaped white teakwood ADA compliant seat.

WR 1960-C-MN & WR 3960-C-MN: Models includes Grab Bars, Fold-Up Seat, Pressure Balance Valve, Hand held Shower with Slide Bar, Vacuum Breaker, & Curtain Rod with Hangers:

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 1- 24" & 1-36" horizontal grab bars and 1 – 24" vertical grab bar. The wall reinforcement is wood fiberglassed into the unit. 1-24" grab bar on the wet wall will be placed 34.5" above the floor. 1-36" grab bar on the back wall will be placed 34.5" above the floor. 1-24" vertical grab bar will be placed 4" above the horizontal bar half way between the front of the unit and the middle of the wet wall.

The ADA compliant seat will be factory installed. The seat will support a minimum of 250 #s. The seat will be placed on the side wall opposite the controls 18" above the floor & cover the full depth of the stall. The seat is an "L" shaped phenolic white ADA compliant seat. 1-Symmons Temptrol Valve & Kit model # S-25-300-B30-V-X-2000 will include a Temptrol 2000 pressure balance valve, Hand held shower with 30" bar, Vacuum breaker. Also, 1-Seachrome 5' Curtain rod with hangers will be included with the unit.



Warm Rain® Corporation

P.O. Box 600 • Houghton County Airpark • Hancock, Michigan 49930

Phone: (906) 482-3750 Fax: (906) 482-2585 • E-mail: tedk@warmrain.com • Website: www.warmrain.com