

Specification for Models:

WR 6060-MN, WR 6060-A-MN, WR 6060-B-MN and WR 6060-C-MN


Warm Rain® model WR 6060-MN's Friendly™ showers fixtures are constructed of reinforced polyester resin covered with a high gloss gel-coat of 18 - 20 mil. thickness. The reinforced fiberglass includes a minimum content of 18 % fiberglass.

The base is an integral part of the unit.

The unit will measure 60.5" x 60" x 77" and has a **1 3/4" outer threshold with 1/2" inside dam.**

These units are reinforced for the future installation of grab bars. The reinforcement is shown in the diagram below. See page 2 for options including grab bars & fold-up seat.

These Warm Rain® Friendly™ showers arrive on site fully tested, inspected, and certified to meet or exceed the precise standards established by FHA/HUD, materials bulletin 73, American National Standards Z-124.1 and Z-124.2, ASTM/E-84, F-462 (slip resistant,) NFPA 258 – Class B (75 or less) rating and is certified by the National Association of Home Builders NAHB. These Adaptable units comply with the Fair Housing Act.

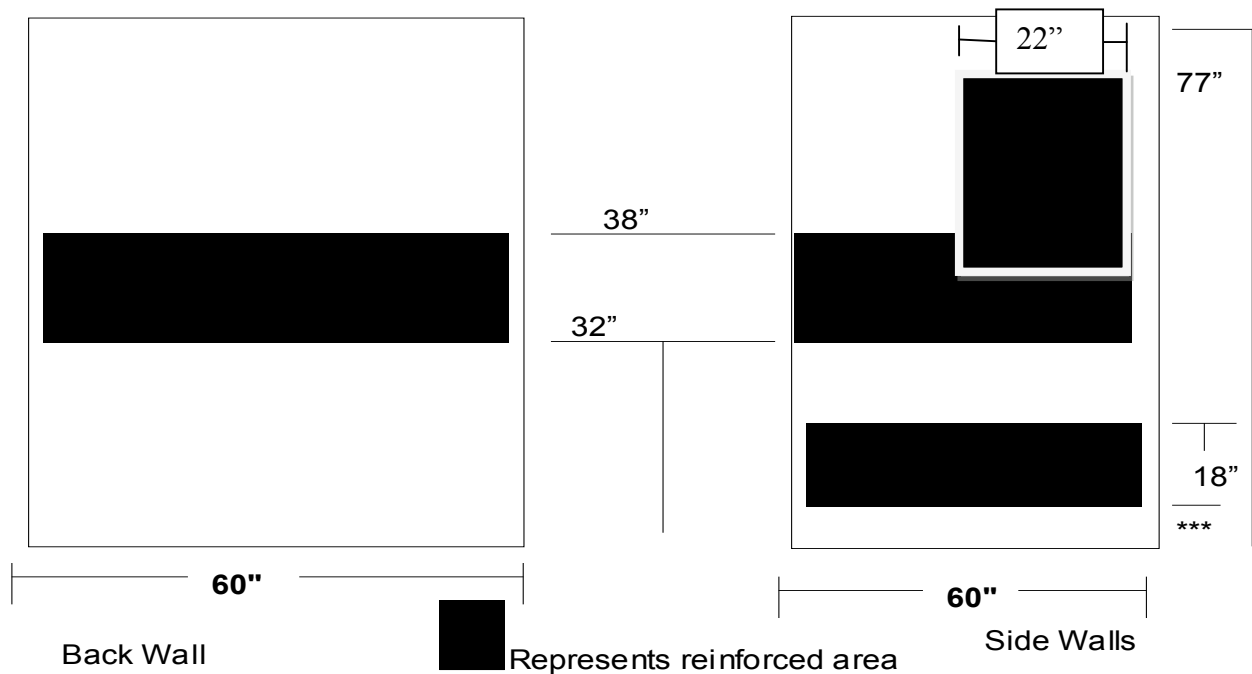

Reinforcement for fold-up seat is only on B & C Packages

Warm Rain® Corp.

P.O. Box 600 * 51675 N. Industrial Drive * Hancock, MI 49930

Voice: 906-482-3750 Fax: 906-482-2585 E-mail: tedk@warmrain.com Website: www.warmrain.com

Specification for Models:

WR 6060-MN, WR 6060-A-MN, WR 6060-B-MN and WR 6060-C-MN

WR 6060-A-MN: Model includes Grab Bars

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 3 - 48" horizontal grab bars and 1 - 24" vertical grab bar. The wall reinforcement is wood fibreglassed into the unit. 1 - 48" bar will be placed on both the wet wall and the dry wall 34.5" above the floor. 1 - 48" grab bar will be placed on the back wall 34.5" above the floor. 1-24" vertical grab bar will be placed 4" above the horizontal bar half way between the front of the unit and the middle of the wet wall.

WR 6060-B-MN: Model includes Grab Bars & a Fold-up seat

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 2 - 48" horizontal grab bars and 1 - 24" vertical grab bar. The wall reinforcement is wood fibreglassed into the unit. 1 - 48" bar will be placed on the wet wall 34.5" above the floor. 1 - 48" grab bar will be placed on the back wall 34.5" above the floor. 1-24" vertical grab bar will be placed 4" above the horizontal bar half way between the front of the unit and the middle of the wet wall. The ADA compliant fold-up seat will be factory installed. The seat will support a minimum of 250 #'s. The seat will be placed on the side wall opposite the controls 18" above the floor. The seat shall be a phenolic white ADA compliant seat.

WR 6060-C-MN: Model includes Grab Bars, Fold-up seat, Pressure Balance Valve, Hand held shower with slide bar, Vacuum Breaker, & Curtain rod with brackets

The grab bars will be factory installed. The grab bars will be 1 1/2" outside diameter ADA compliant stainless steel bars. There are 2 - 48" horizontal grab bars and 1 - 24" vertical grab bar. The wall reinforcement is wood fibreglassed into the unit. 1 - 48" bar will be placed on the wet wall 34.5" above the floor. 1 - 48" grab bar will be placed on the back wall 34.5" above the floor. 1-24" vertical grab bar will be placed 4" above the horizontal bar half way between the front of the unit and the middle of the wet wall. The ADA compliant fold-up seat will be factory installed. The seat will support a minimum of 250 #'s. The seat will be placed on the side wall opposite the controls 18" above the floor. The seat shall be a phenolic white ADA compliant seat. 1 - Symmons Temptrol Valve & Kit model # S-25-300-B30-V-X-2000 will include a Temtrol 2000 pressure balance valve, hand held shower with a 30" bar, and a vacuum breaker. Also, 1 - Seachrome curtain rod with brackets will be included.



Warm Rain® Corp.

P.O. Box 600 * 51675 N. Industrial Drive * Hancock, MI 49930

Voice: 906-482-3750 Fax: 906-482-2585 E-mail: tedk@warmrain.com Website: www.warmrain.com