


FRONT-FIT™ REMODELING SHOWERS



The Front-Fit™ Remodeling System revolutionized the remodeling world in 2001 and continues to be the most popular remodeling system selected by Professional Plumbers in the upper Midwest.

The Front-Fit™ Remodeling System is easy to install from the front side of the bathing unit. With its unique Channel-Locking system, there is no need to get behind and bolt the top section to the bottom base. This system saves the plumbing contractor time, money and hassle on installing these beautiful remodeling showers and tub/showers. Even when the pocket is out of square (within reason) the built-in efficiencies of the Front-Fit™ allow the contractor to install the bathing unit with ease.

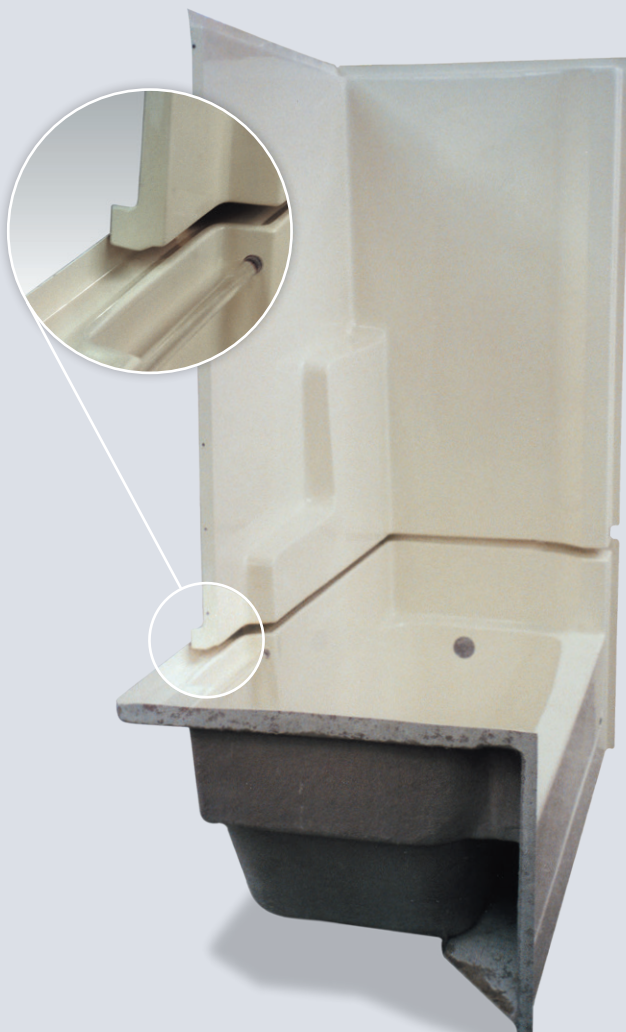

WR 248 FF

Unit Outside Dimension: 48" x 36" x 79"

Inside Dimension: 44" x 29"

Front Outside Threshold height: 3"

Inside dam height: 1 ½"

Door Opening: 41 7/8" x 74"

Shipping weight starting at: 135 lbs.



Features:

- Front-Fit™ remodeling shower
- Low front threshold for easy entrance and exit
- Four corner shelves for shampoos, soaps and accessories
- Corner Foot rest at 11 ½" above the floor for shaving legs or washing feet comfortably
- Flat back wall for 24" horizontal grab bar at 34" above the floor (ADA height)
- Textured floor - meets and exceeds ASTM F-462 slip resistance standard
- Reinforced pillars for shower door or curtain rod support
- No Seat for extremely spacious 48" x 36" shower

Options:

WR-T85 dome, dome light, custom backing for grab bars and fold-up seat (see model H-248 for grab bars and fold-up seat)

